






ArcelorMittal

Magnelis[®]

The durable coating
for solar structures

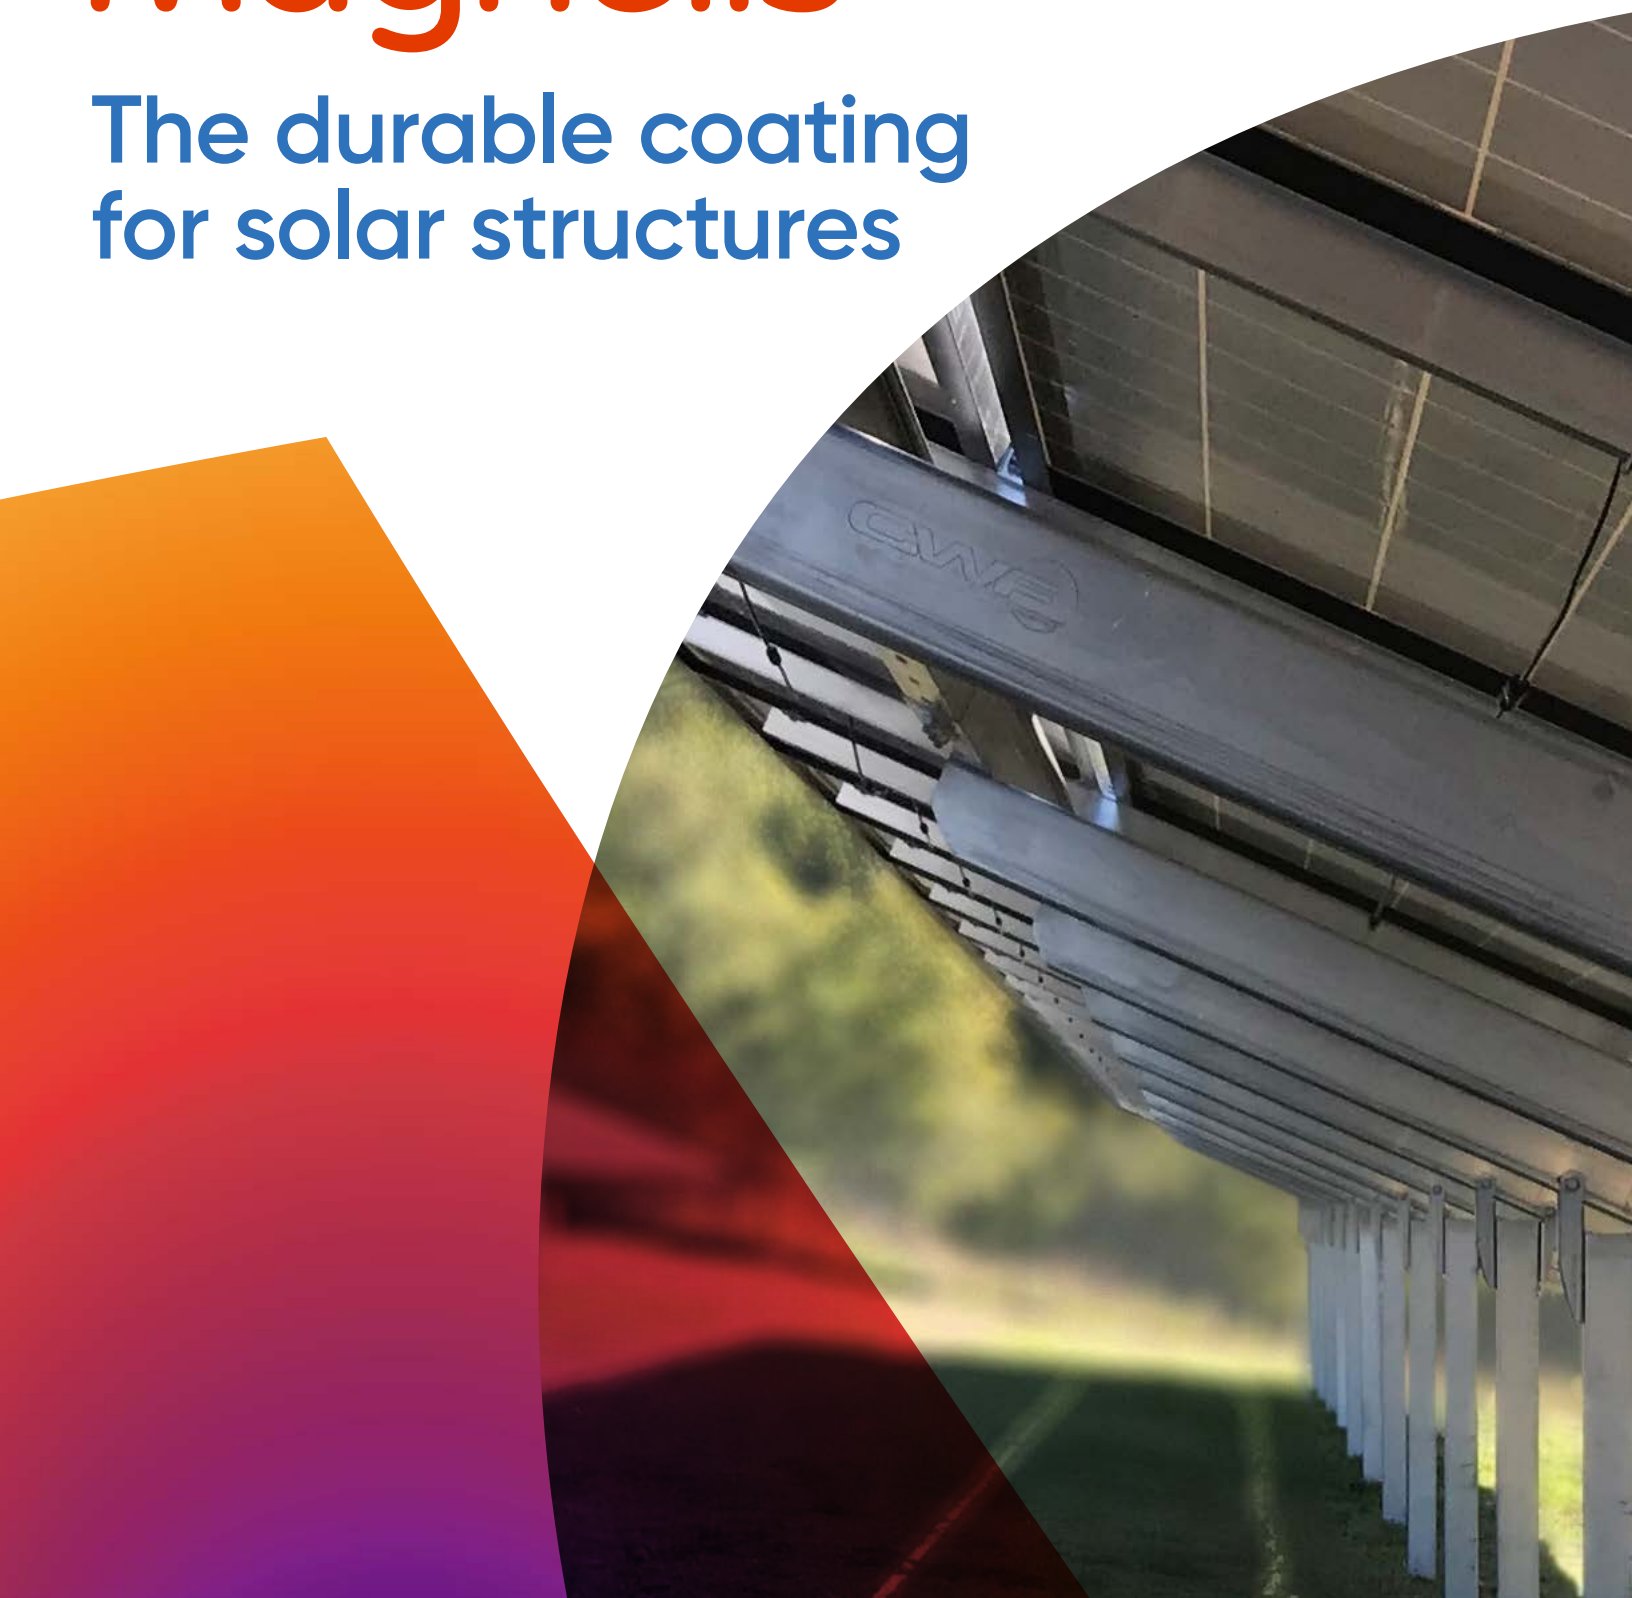


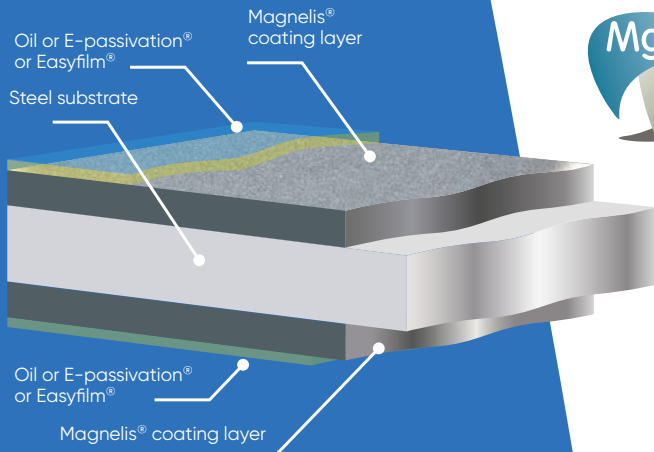

Magnelis® is an exceptional metallic coating containing 3% magnesium, 3.5% aluminium and zinc. This unique composition provides unparalleled surface and cut-edge protection against corrosion.

Magnelis® increases the protection against corrosion for mounting structures of Photovoltaic (PV) solar farms (rooftop and ground-mounted). Magnelis® is used in some of the largest PV plants in the world and has a track record of more than a decade. Magnelis® is included in the new version of ASTM A1046-19 and classified as a Type 2 coating.

Improvement factor between Magnelis® and regular galvanized steel in field testing

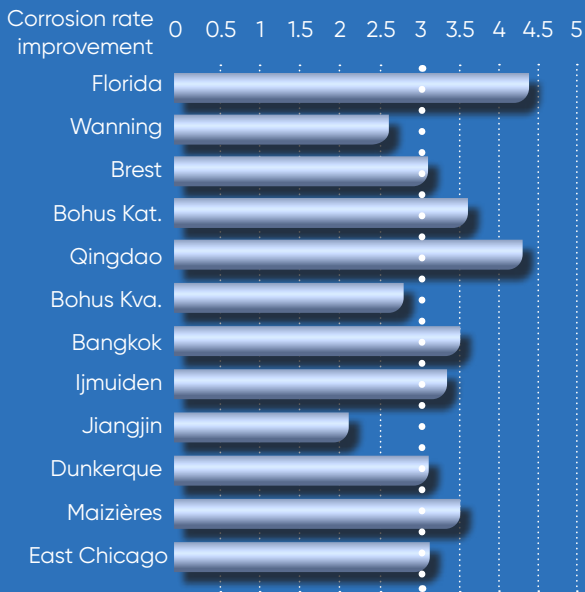

Average improvement: ~ 3 compared to regular galvanized steel

Expected lifetime to first maintenance

(First spots of red rust requiring a first local maintenance)

Corrosion category ISO 9223	Galvanized G90 (20 microns per side)	Magnelis® ZM40/ZMM120 (10 microns per side)
C2	18 y to > 50 y	25 y to > 50 y
C3	6 y to 18 y	8 y to 25 y
C4	3 y to 6 y	4 y to 8 y
C5	Not Appropriate	Not Appropriate

These durations are indicative and non-binding. For information, European standard EN508-1:2021 for self-supporting products of steel sheets imposes minimum coating thickness of ZMM180 (for ZM coatings) and G115 (for galvanized steel) for bare metallic coated steel, without paint, used for outdoor applications.


Outstanding corrosion performance

Magnelis® has been tested in a variety of environments worldwide. Test results show that Magnelis® exhibits in average corrosion rates 3 times smaller than regular galvanized steel. This leads to an increase of expected lifetimes with a factor 3. Based on this performance, it is possible to evaluate the "lifetime to first maintenance" for Magnelis® products.

Lifetime to first maintenance is defined as the minimum duration until the coating deteriorates to a point requiring the first local maintenance to avoid enlargement of the corroded area. Deterioration occurs due to the local consumption of the undamaged coating. First local maintenance is required when the first spots of red rust appear.

These durations are calculated based on single spot minimum coating thicknesses (as per EN 10346 and ASTM A1046 standards), and based on corrosion rates as per the German Technical Approval for Magnelis® delivered by DiBt (Z-30.11-51).


Expected lifetimes

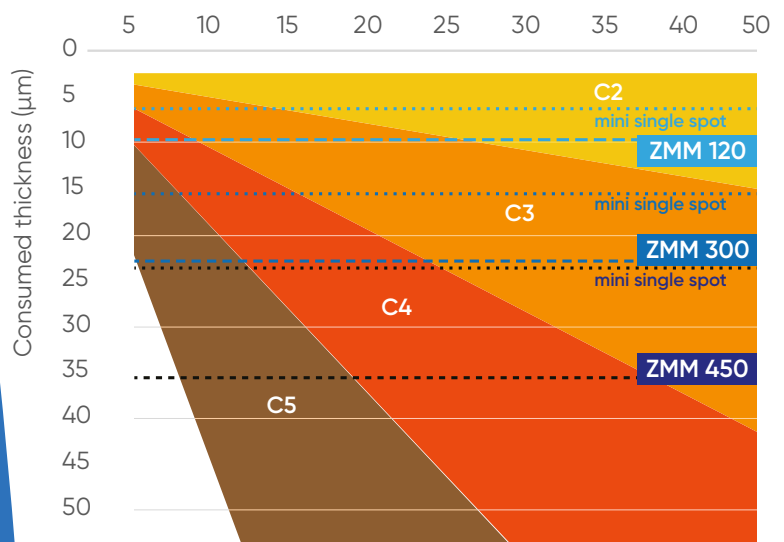

Edge protection with self-healing effect

When exposed to an environment, Magnelis® forms a very dense zinc-based protective film, unlike galvanized steel, whose film is very porous.

This unique dense film is formed on edges, welds, perforations and scratches and provides a global protection to the produced parts.

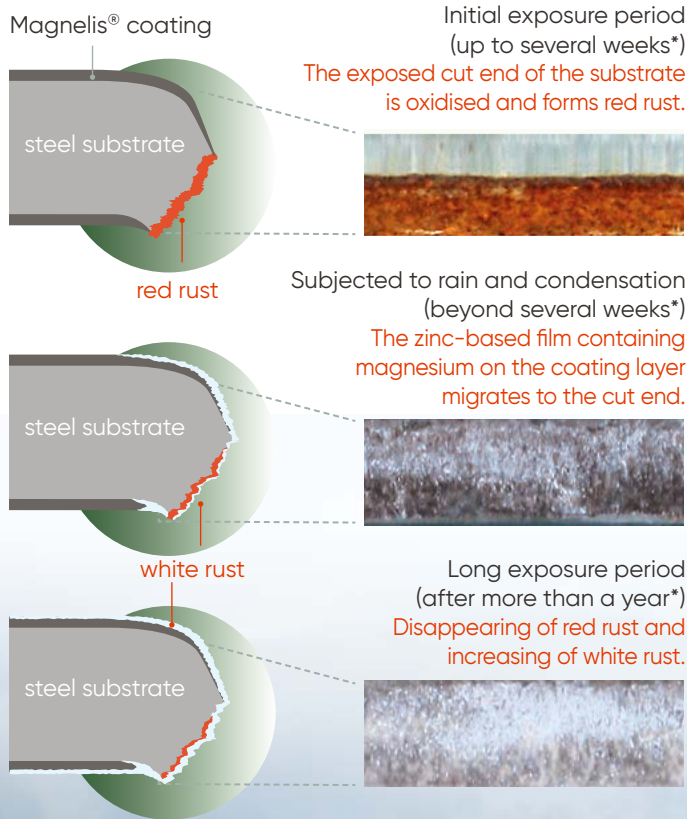

* The speed of the self-healing depends on the environment.


High durability, even in soils

Magnelis® durability was extensively tested in contact with different types of soils to acquire deep proprietary knowledge. These tests confirm that Magnelis® outperforms galvanized steel for durability in soils.



Field outdoor testing at ArcelorMittal Global R&D centre (OCAS)

Illustrative result from soil corrosion testing by ArcelorMittal Global R&D:

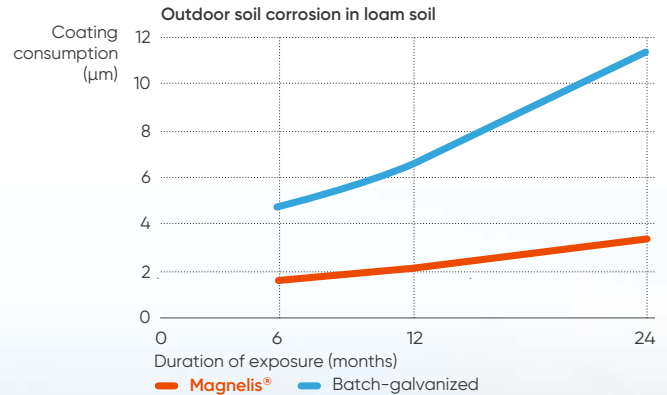

This improved performance is confirmed by a third-party assessment. The French Corrosion Institute, a subsidiary of RISE Research Institutes of Sweden AB, is among the largest laboratories in the world in the field of protection of materials against corrosion. After many soil tests with Magnelis®, this lab concluded that *"Corrosion resistance of Magnelis® in soils was improved by an average factor of 3.8 compared to continuous hot dip zinc coating"*.

These results suggest that for the durability needs of solar structures, Magnelis® ZMM450 and ZMM620 or above are recommended for poles rammed in soils or embedded in concrete.



Additional advantages

Beyond high corrosion resistance, Magnelis® offers several additional benefits.

Easy substitution of galvanized by Magnelis:

- Same roll-forming tools or dies can be used with Magnelis® than those for regular galvanized products, saving on setup time and cost.
- Magnelis® has a lower friction coefficient and induces less powdering. Its harder surface compared with galvanized steel increases surface protection against scratches during forming and handling operations.

Benefits for part manufacturing include:

- Reduction of the pollution of forming tools (such as profiling rolls). Magnelis® is a harder coating than pure zinc galvanized coatings and exhibits a lower friction. This leads to less sensitivity to scratches and less powdering.
- Reduction of cleaning frequency and overall maintenance.

Benefits for welding:

- Thinner Magnelis® coating means that welding consumes less energy which reduces the emission of fumes and splashes in comparison to regular galvanized products. It leads to increased welding speed & productivity.
- A more efficient welding process reduces the amount of consumables used (energy, reactive gas, filler wire, ...).

Benefits for the environment:

Magnelis® is 100 percent and infinitely recyclable. Replacing galvanized steel with Magnelis® reduces the environmental footprint of manufactured products by:

- using fewer raw materials and natural resources at the galvanizing stage;
- reducing zinc run-off during the product's life, and
- increasing the lifetime of the finished product.

Combination with HyPer high strength steels

Magnelis® can also be combined with higher strength steels, allowing immediate weight, cost and CO₂ footprint reductions. These HyPer grades are a cost-effective solution adapted for structural parts such as poles and tubes.

In conclusion

Magnelis® is proven to extend the lifetime of solar structures. Applications of Magnelis® will maximize return on investment of Photovoltaic plants through delaying and/or reducing maintenance costs. Key advantages in solar structures include:

- Guaranteed durability up to 25 years, including in contact with soils or embedded in concrete
- Improved resistance against abrasion
- Wide range both in thickness and steel grade
- Cost advantage in comparison to post galvanization
- Reduced environmental impact.

Coating designation	ASTM A1046M	ZMM90	ZMM120	ZMM180	ZMM300	ZMM450	ZMM620
	ASTM A1046	ZM30	ZM40	ZM60	ZM100	ZM140	ZM220
Coating mass (total both sides)	g/m ²	90	120	180	300	450	620
	oz/ft ²	0.30	0.40	0.60	1.00	1.40	2.00
Coating thickness	µm/per side	7	10	14	24	36	50
	mils/side	0.28	0.38	0.55	0.94	1.41	1.95
Surface treatment	E-Passivation® (CrVI-free), Easyfilm® (acrylic), Oiled						
Thickness	0.018 to 0.236 inches (0.45 to 6.00 mm)						
Width	Up to 66 inches (1680 mm)						
Steel grades*	CS Type A, B and C Grades 50 up to 100 (including high-elongation grades)						

* Contact us for the detailed feasibility

ArcelorMittal International America, LLC

1N. Wacker Dr., Ste. 2905
Chicago, IL 60606 USA
T +312 777 1879

Magnelis.USA@arcelormittal.com



ArcelorMittal

Credits

Photos cover: CWF
inside: ArcelorMittal Global R&D, CWF, Profil du Futur

Copyright

All rights reserved. No part of this publication may be reproduced in any form or by any means whatsoever, without prior written permission from ArcelorMittal. Care has been taken to ensure that the information in this publication is accurate, but this information is not contractual. ArcelorMittal and any other ArcelorMittal Group company do not therefore accept any liability for errors or omissions or any information that is found to be misleading. As this document may be subject to change at any time, please consult the latest information in the product document centre at industry.arcelormittal.com